

FEATURES

- ▶ Space saving design only 1.4" (35.6mm) deep
- ▶ Occupies less than 2.5 x 1.1 inches of front panel space
- ▶ High contrast LCD
- ▶ 3½ digits with 0.39" LCD
- ▶ Snap-In bezel eliminates the need for mounting hardware
- ▶ User-selectable decimal points
- ▶ Process input (4 to 20mA) adder board with multi-turn SPAN (GAIN) and ZERO (OFFSET) adjustments
- ▶ Loop powered

SPECIFICATIONS

DISPLAY

Digits: 3 ½ digits (± 1999 counts)
 Type: 0.39" (10mm) high contrast reflective LCD
 Polarity: automatic, "-" displayed.
 Decimal Points: 3 position, user-selectable
 Overrange: three lower order digits blank for inputs >1999 & < -1999

INPUTS

Ranges: process inputs, 4 to 20 mA
 Configuration: bipolar, differential
 Protection: 30 mA max.
 Loop Burden: 300 Ω nominal @ 20 mA DC (loop powered)

PERFORMANCE

Accuracy: $\pm(0.1\% + 1$ counts) typical
 $\pm(0.2\% + 2$ counts) maximum
 Conversion Rate: 3 per second
 Normal Mode Rejection: >30 dB @ 60 Hz
 Adjustments: automatic
 Warmup: 10 minutes typical
 Temperature Coeff.: ± 100 ppm per $^{\circ}\text{C}$ typical

ENVIRONMENT

Operating Range: 0 to 50 $^{\circ}\text{C}$
 Storage Range: -10 to 60 $^{\circ}\text{C}$

POWER SUPPLY

powered by the 4-20mA current loop

MOUNTING

LCD: snap-in bezel mount
 Process Board: plugs onto DPM pins, adds approximately 0.6" (16mm) to depth

CONNECTION

screw terminals on process board

ORDERING INFO

PART NUMBER

DK190 4 to 20mA Loop Powered


METER INPUT

ACCESSORIES


PW2-24 Regulated 120V AC to 24V DC Power Supply
 CVC Calibrator





DIMENSIONS

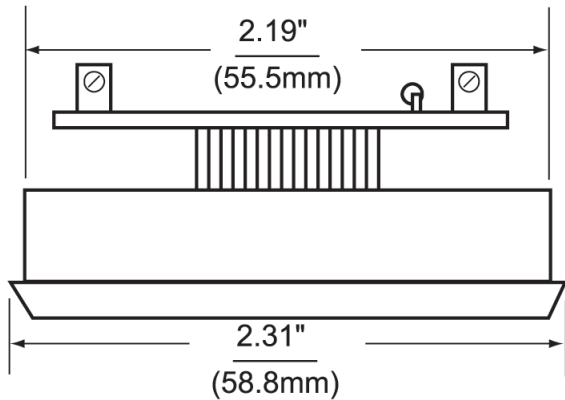

LCD DIMENSIONS

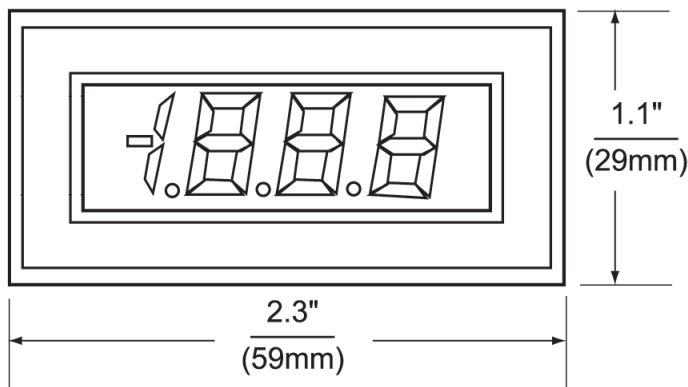


LCD PANEL CUTOUT

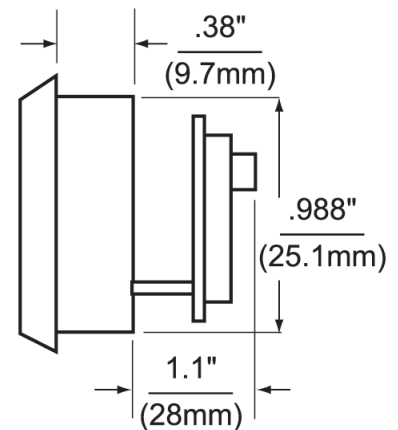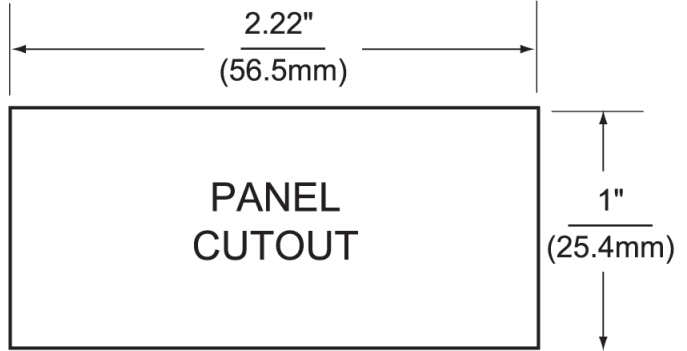


WIRING

1. DECIMAL SELECTION:



2. J1, J2, J3 SELECTION:

IF: OFFSET (ZERO) IS 0 or
 OFFSET (ZERO) > 0 and GAIN (SPAN) ÷ OFFSET (ZERO) ≥ 5



IF: OFFSET (ZERO) > 0 and GAIN (SPAN) ÷ OFFSET (ZERO) < 5

