Flat Pack Pins Wiring

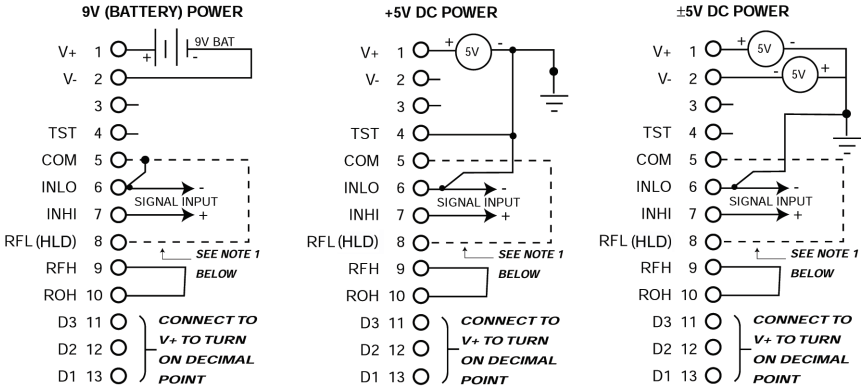

NOTES:

1. *On DPMs with the hold option, DO NOT connect "COM" & "RFL" .*
2. *Isolate the input from supply with 9V connection shown.*
3. *The common mode range of the input on ±5V & +5V powered DPMs is ±2V max*
4. *DO NOT solder pins.*
5. *The 5V backlight power supply is separate from that of the DPM. Connect the supply returns together to reduce noise.*
6. *CAUTION: The DPM part number must match the correct supply voltage.*

Pins Dimensions

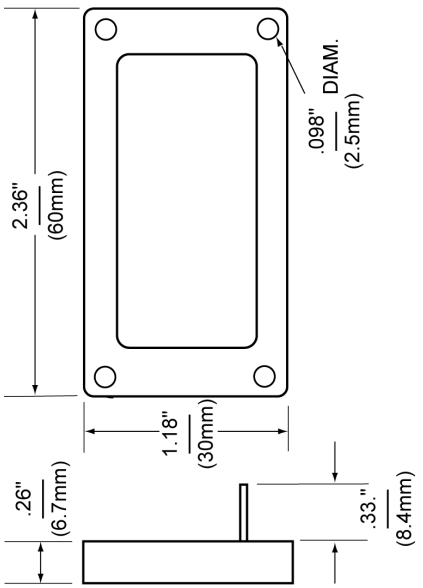

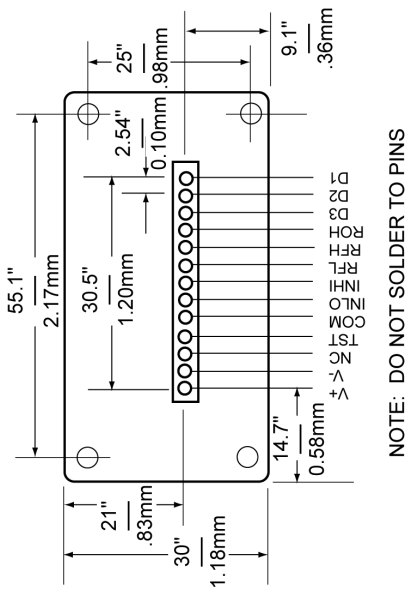

NOTE: DO NOT SOLDER TO PINS